



MP10 Motor Protection

Temperature safety drive for the drive motor


Standard on all compressors (except HG8)

The exceptional feature is that the monitoring function and mains availability are shown by coloured LEDs. There are no complicated or time-consuming defect locating processes.

The MP10 also provides the usual functions as standard, e.g. a reconnection preventing device, a reset, free terminals for PTC temperature sensors (e.g. heat protection thermostat) and other useful items.

Technical data

Unit designation	MP10
Connection voltage	AC 230 V - 1 - 50/60 Hz
Relay	AC 250 V, 3 A, 750 VA ind.
Dimensions L/B/H	100 x 60 x 52 mm

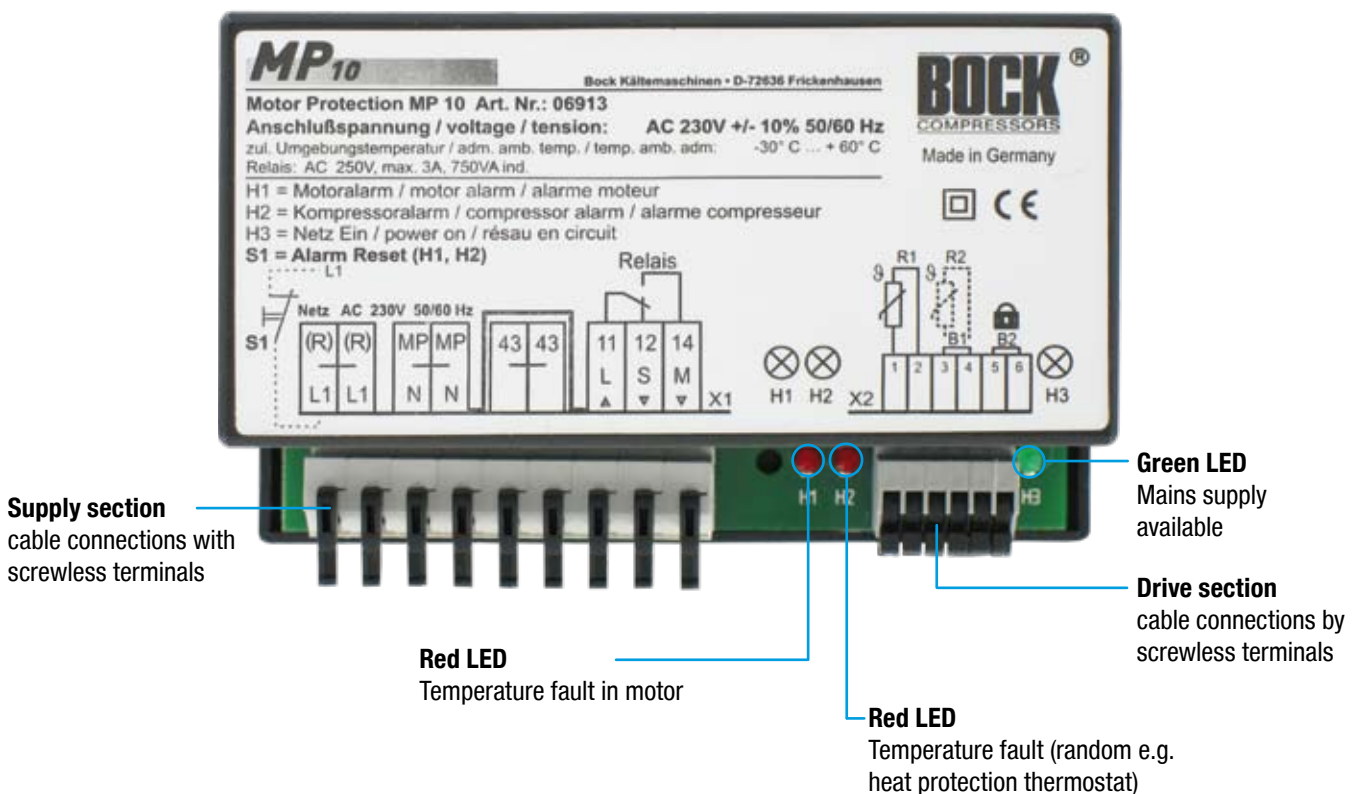

- 01
- 02
- 03
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13